


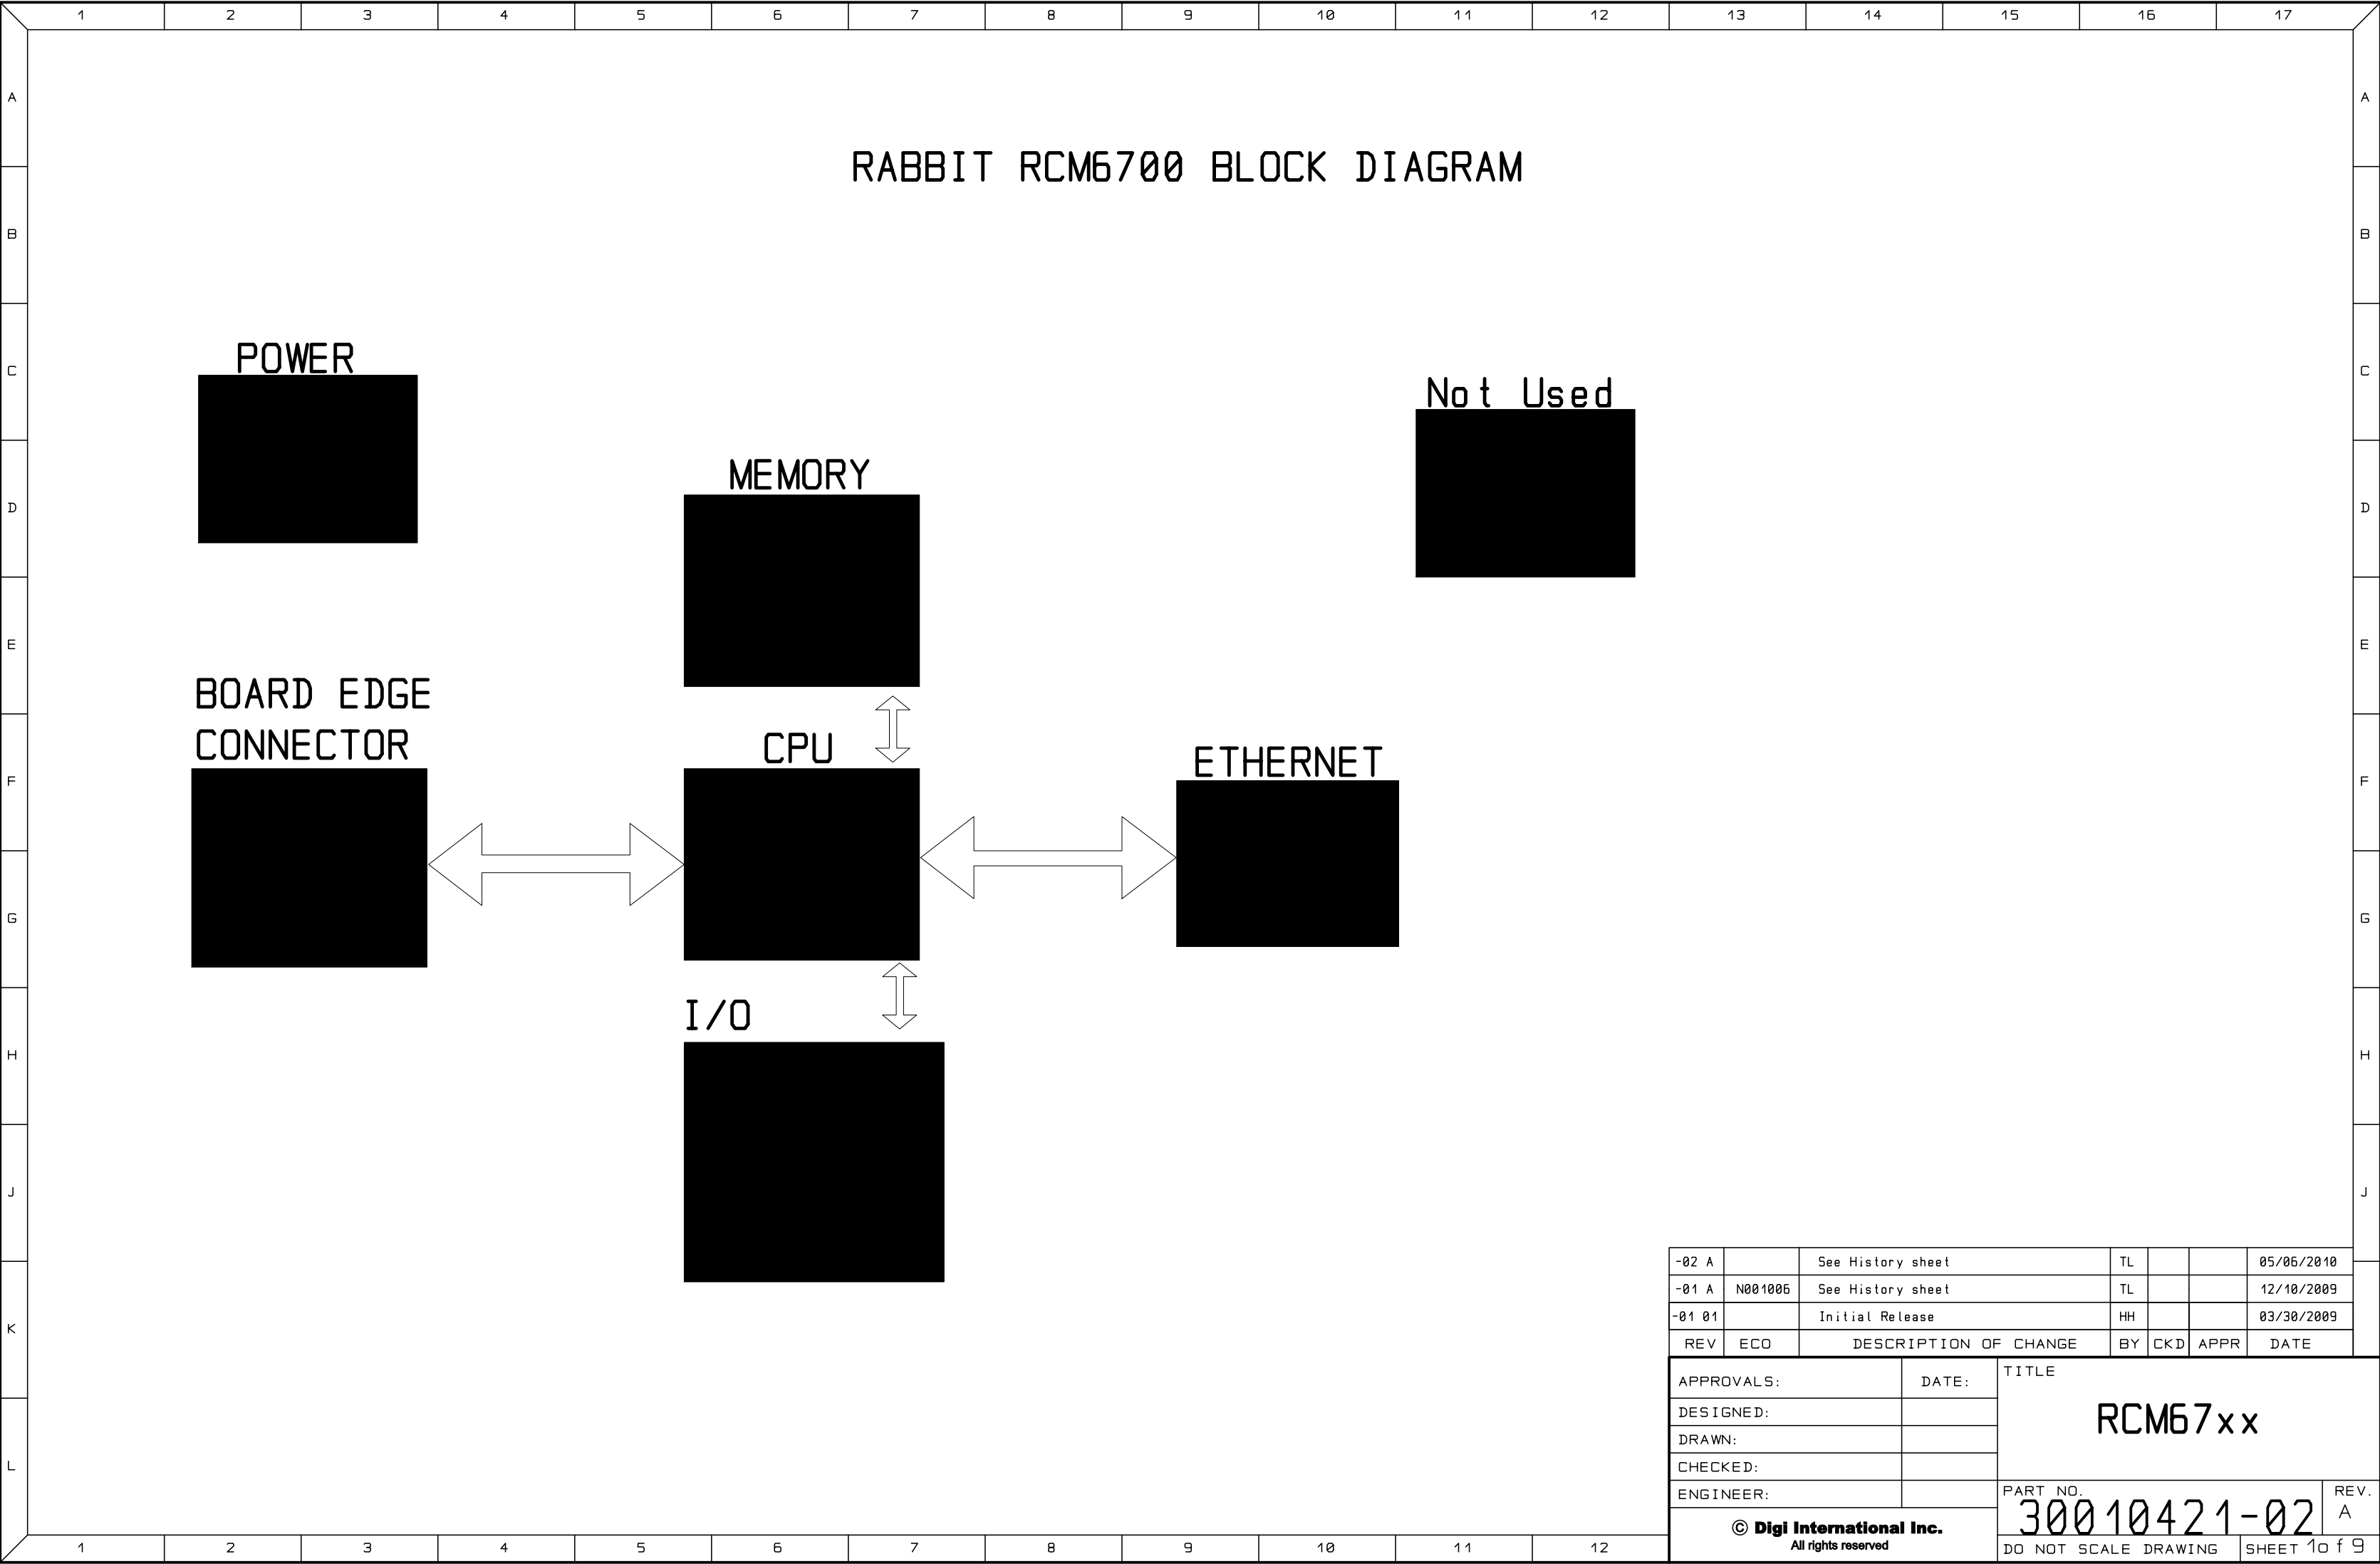



REV	ECO	DESCRIPTION OF CHANGE	BY	CKD	APPR	DATE
-02	A	See History sheet	TL			05/06/2010
-01	A	N001005 See History sheet	TL			12/10/2009
-01	01	Initial Release	HH			03/30/2009


APPROVALS:	DATE:	RCM67xx PART NO. 30010421-02 DO NOT SCALE DRAWING SHEET	
DESIGNED:			
DRAWN:			
CHECKED:			
ENGINEER:			
© Digi International Inc. All rights reserved		REV. A	


-02 A		See History sheet	TL			05/06/2010
-01 A	N001006	See History sheet	TL			12/10/2009
-01 01		Initial Release	HH			03/30/2009
REV	ECO	DESCRIPTION OF CHANGE	BY	CKD	APPR	DATE


APPROVALS:	DATE:	TITLE RCM67xx	
DESIGNED:			
DRAWN:			
CHECKED:			
ENGINEER:			
© Digi International Inc. All rights reserved		PART NO. 30010421-02	REV. A
		DO NOT SCALE DRAWING	SHEET

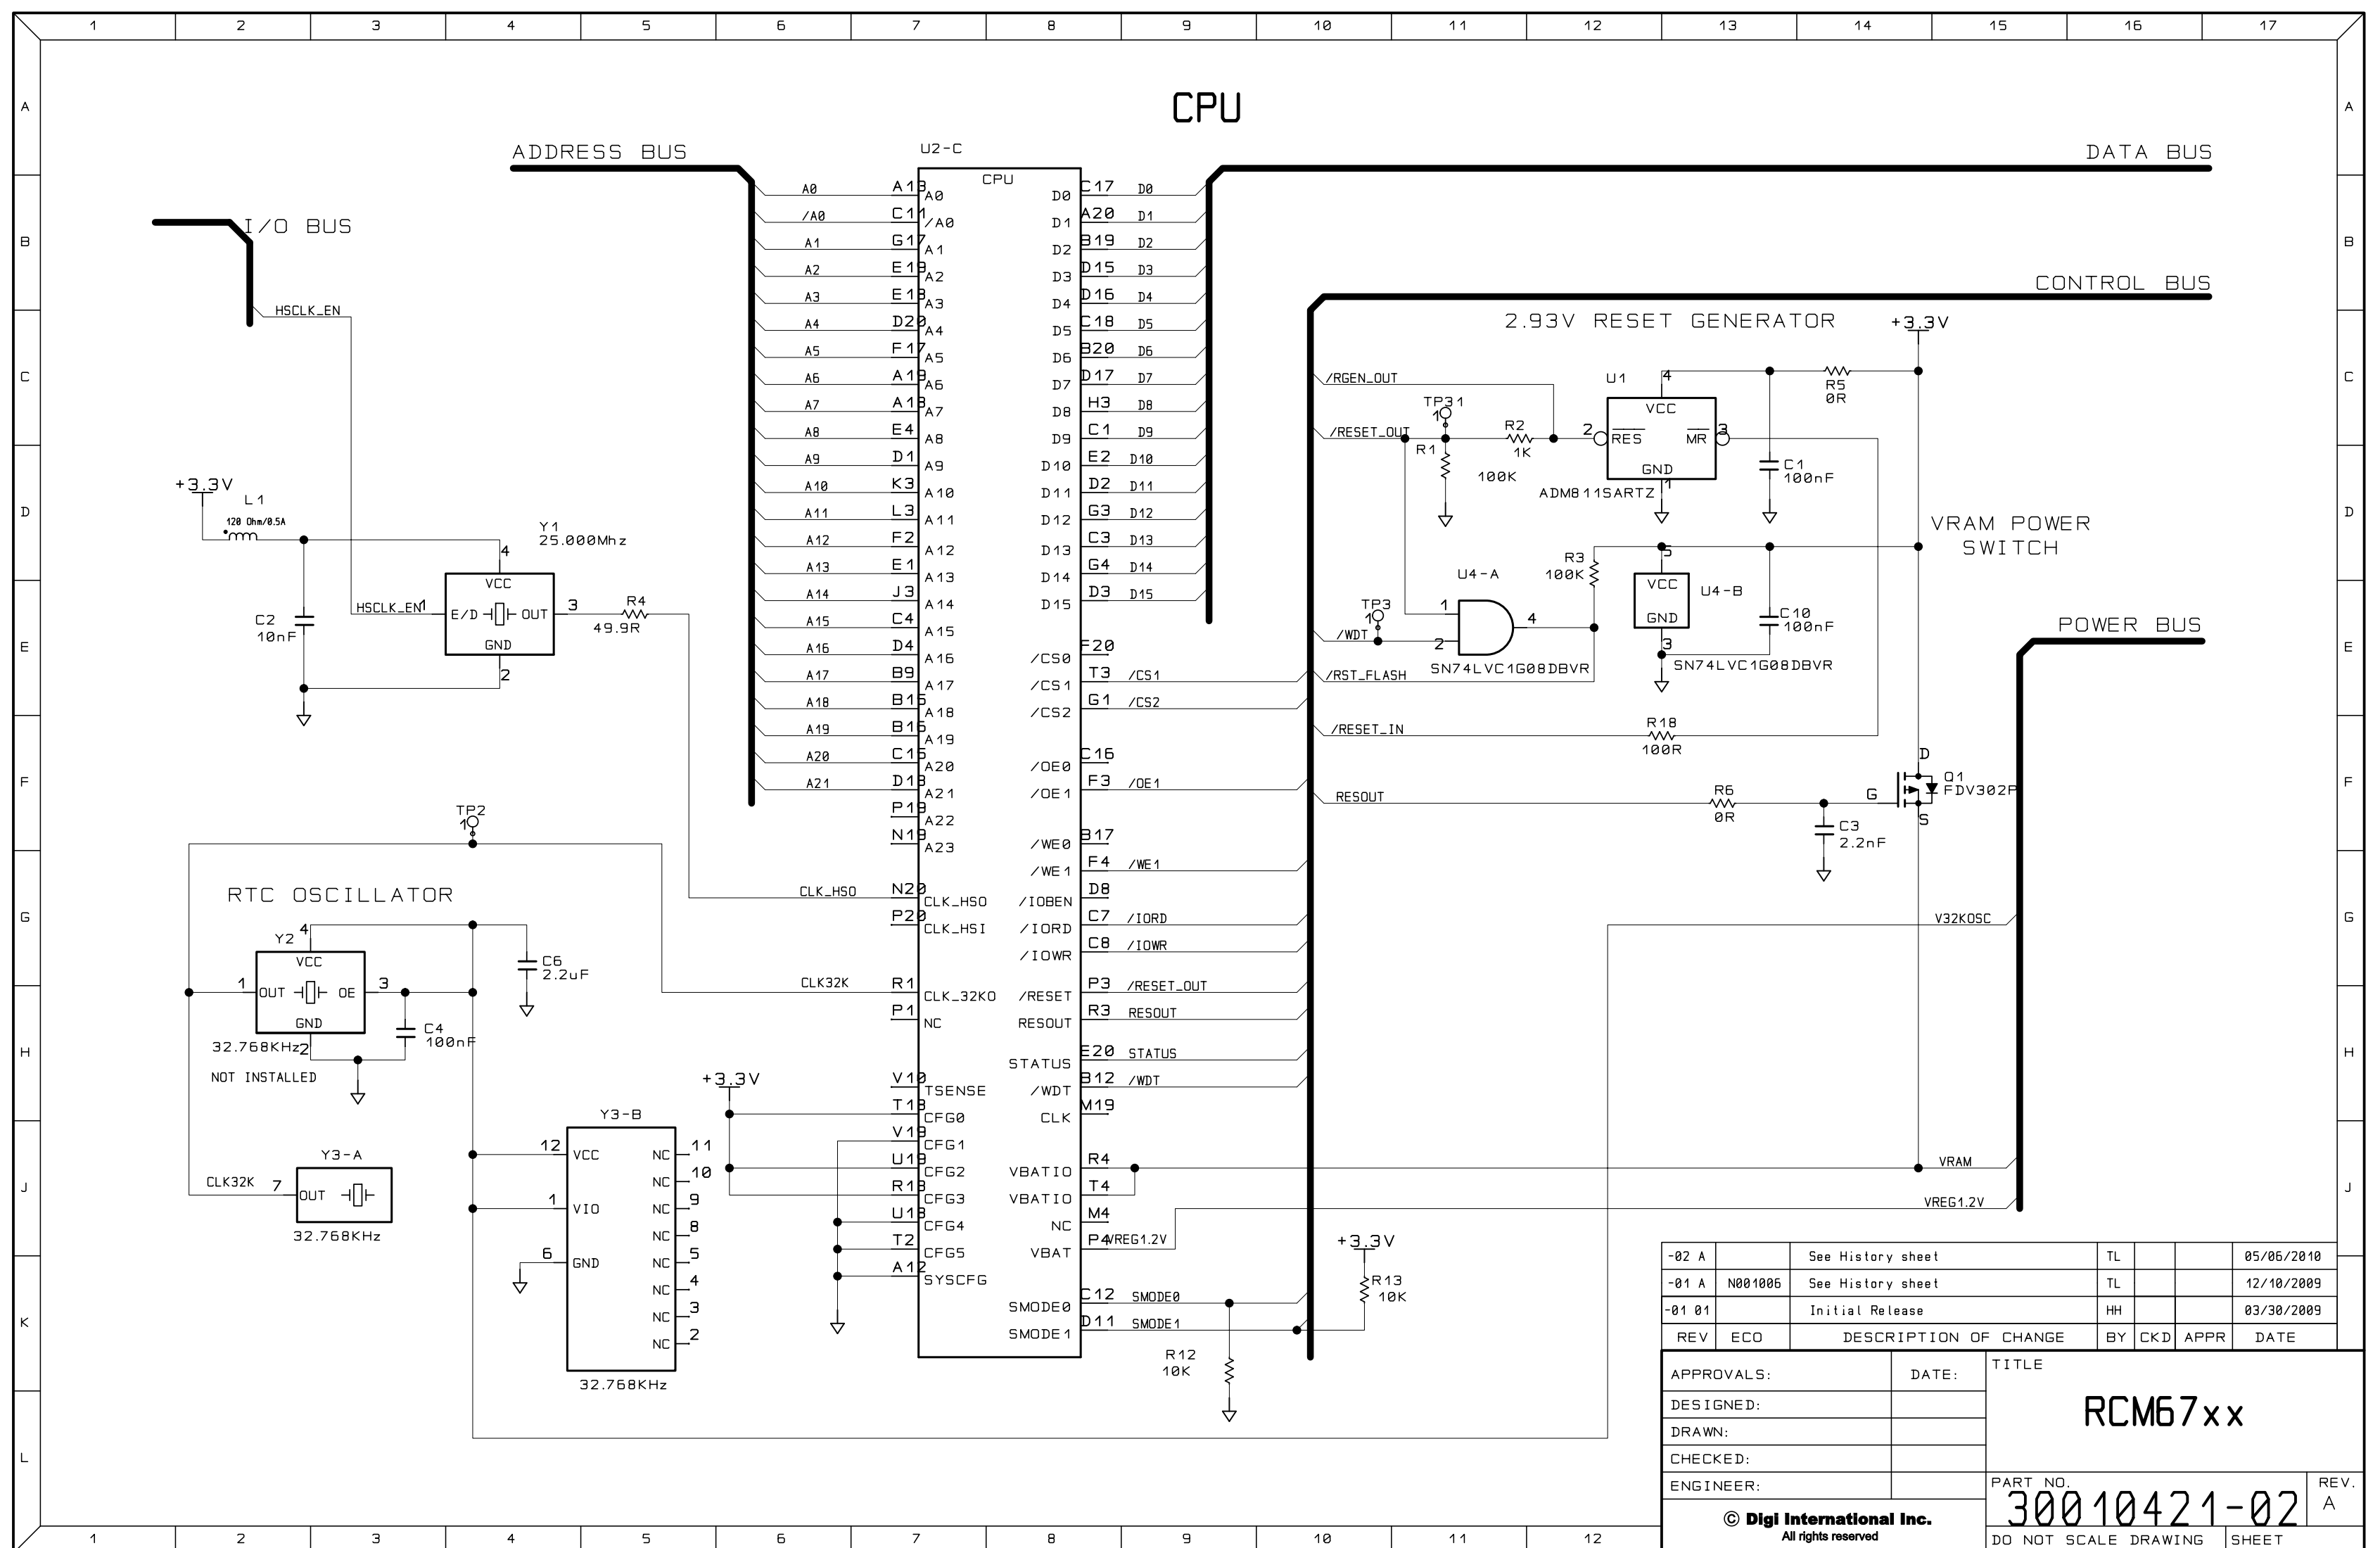


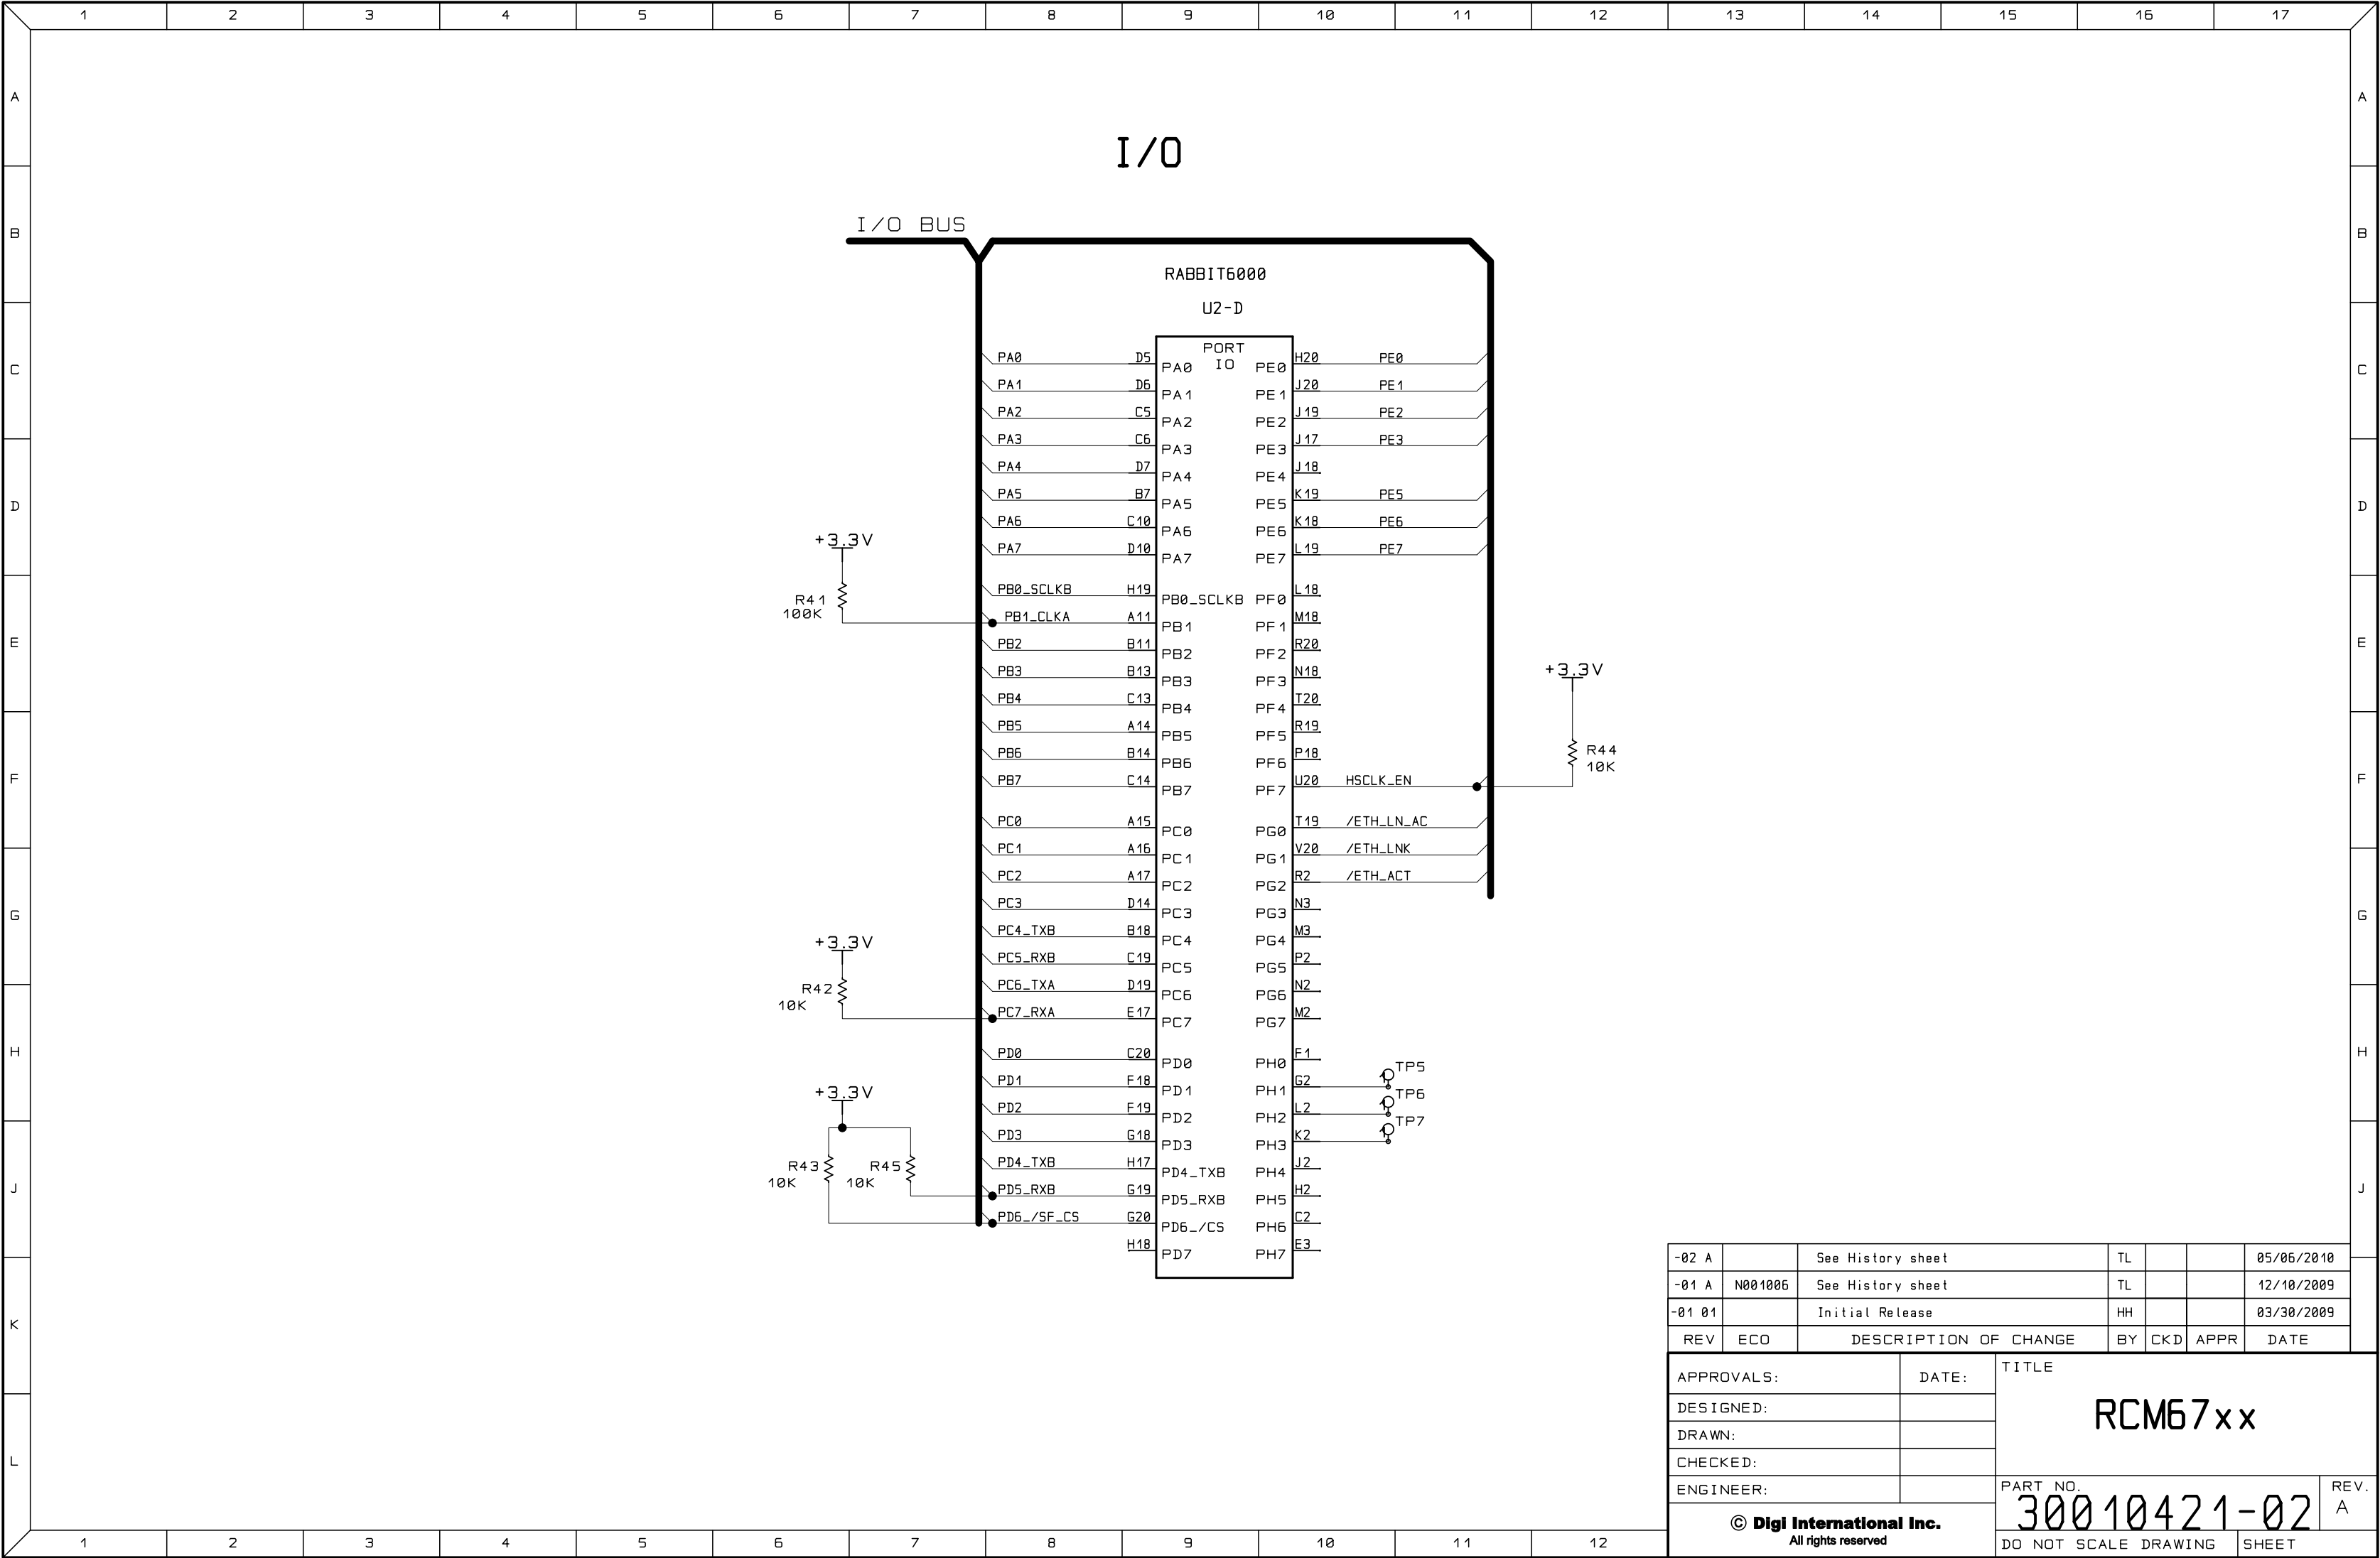

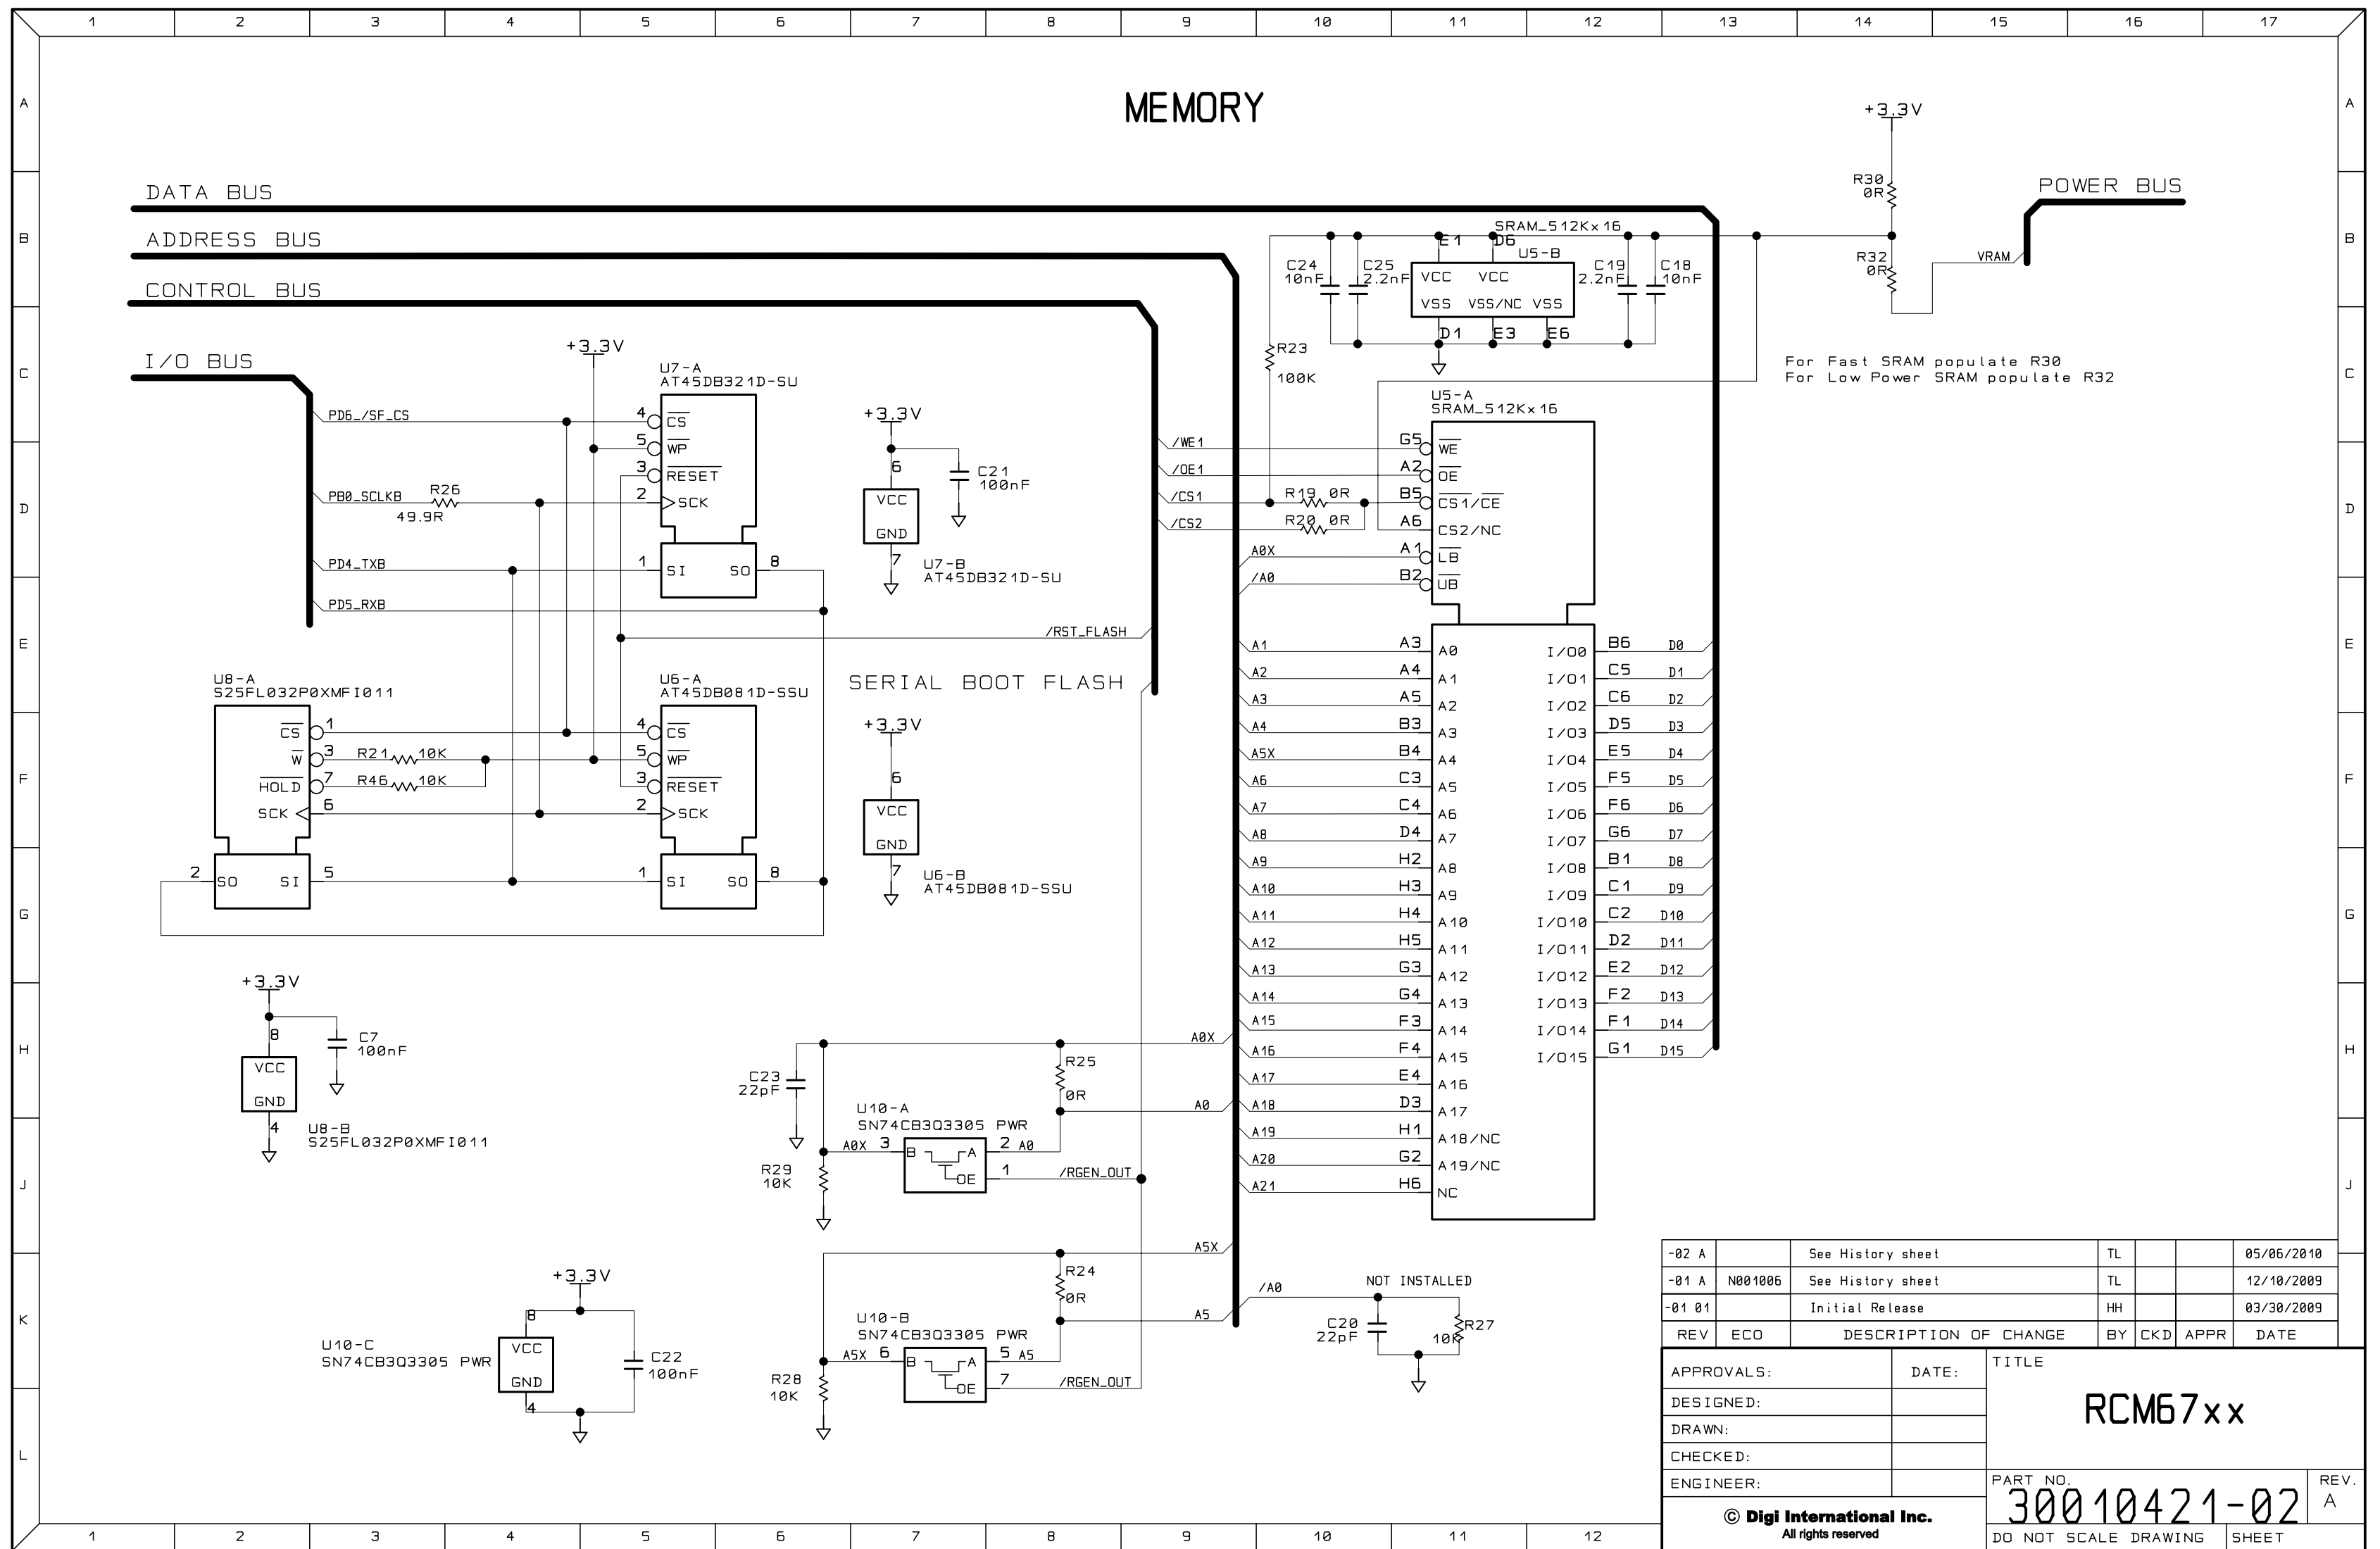

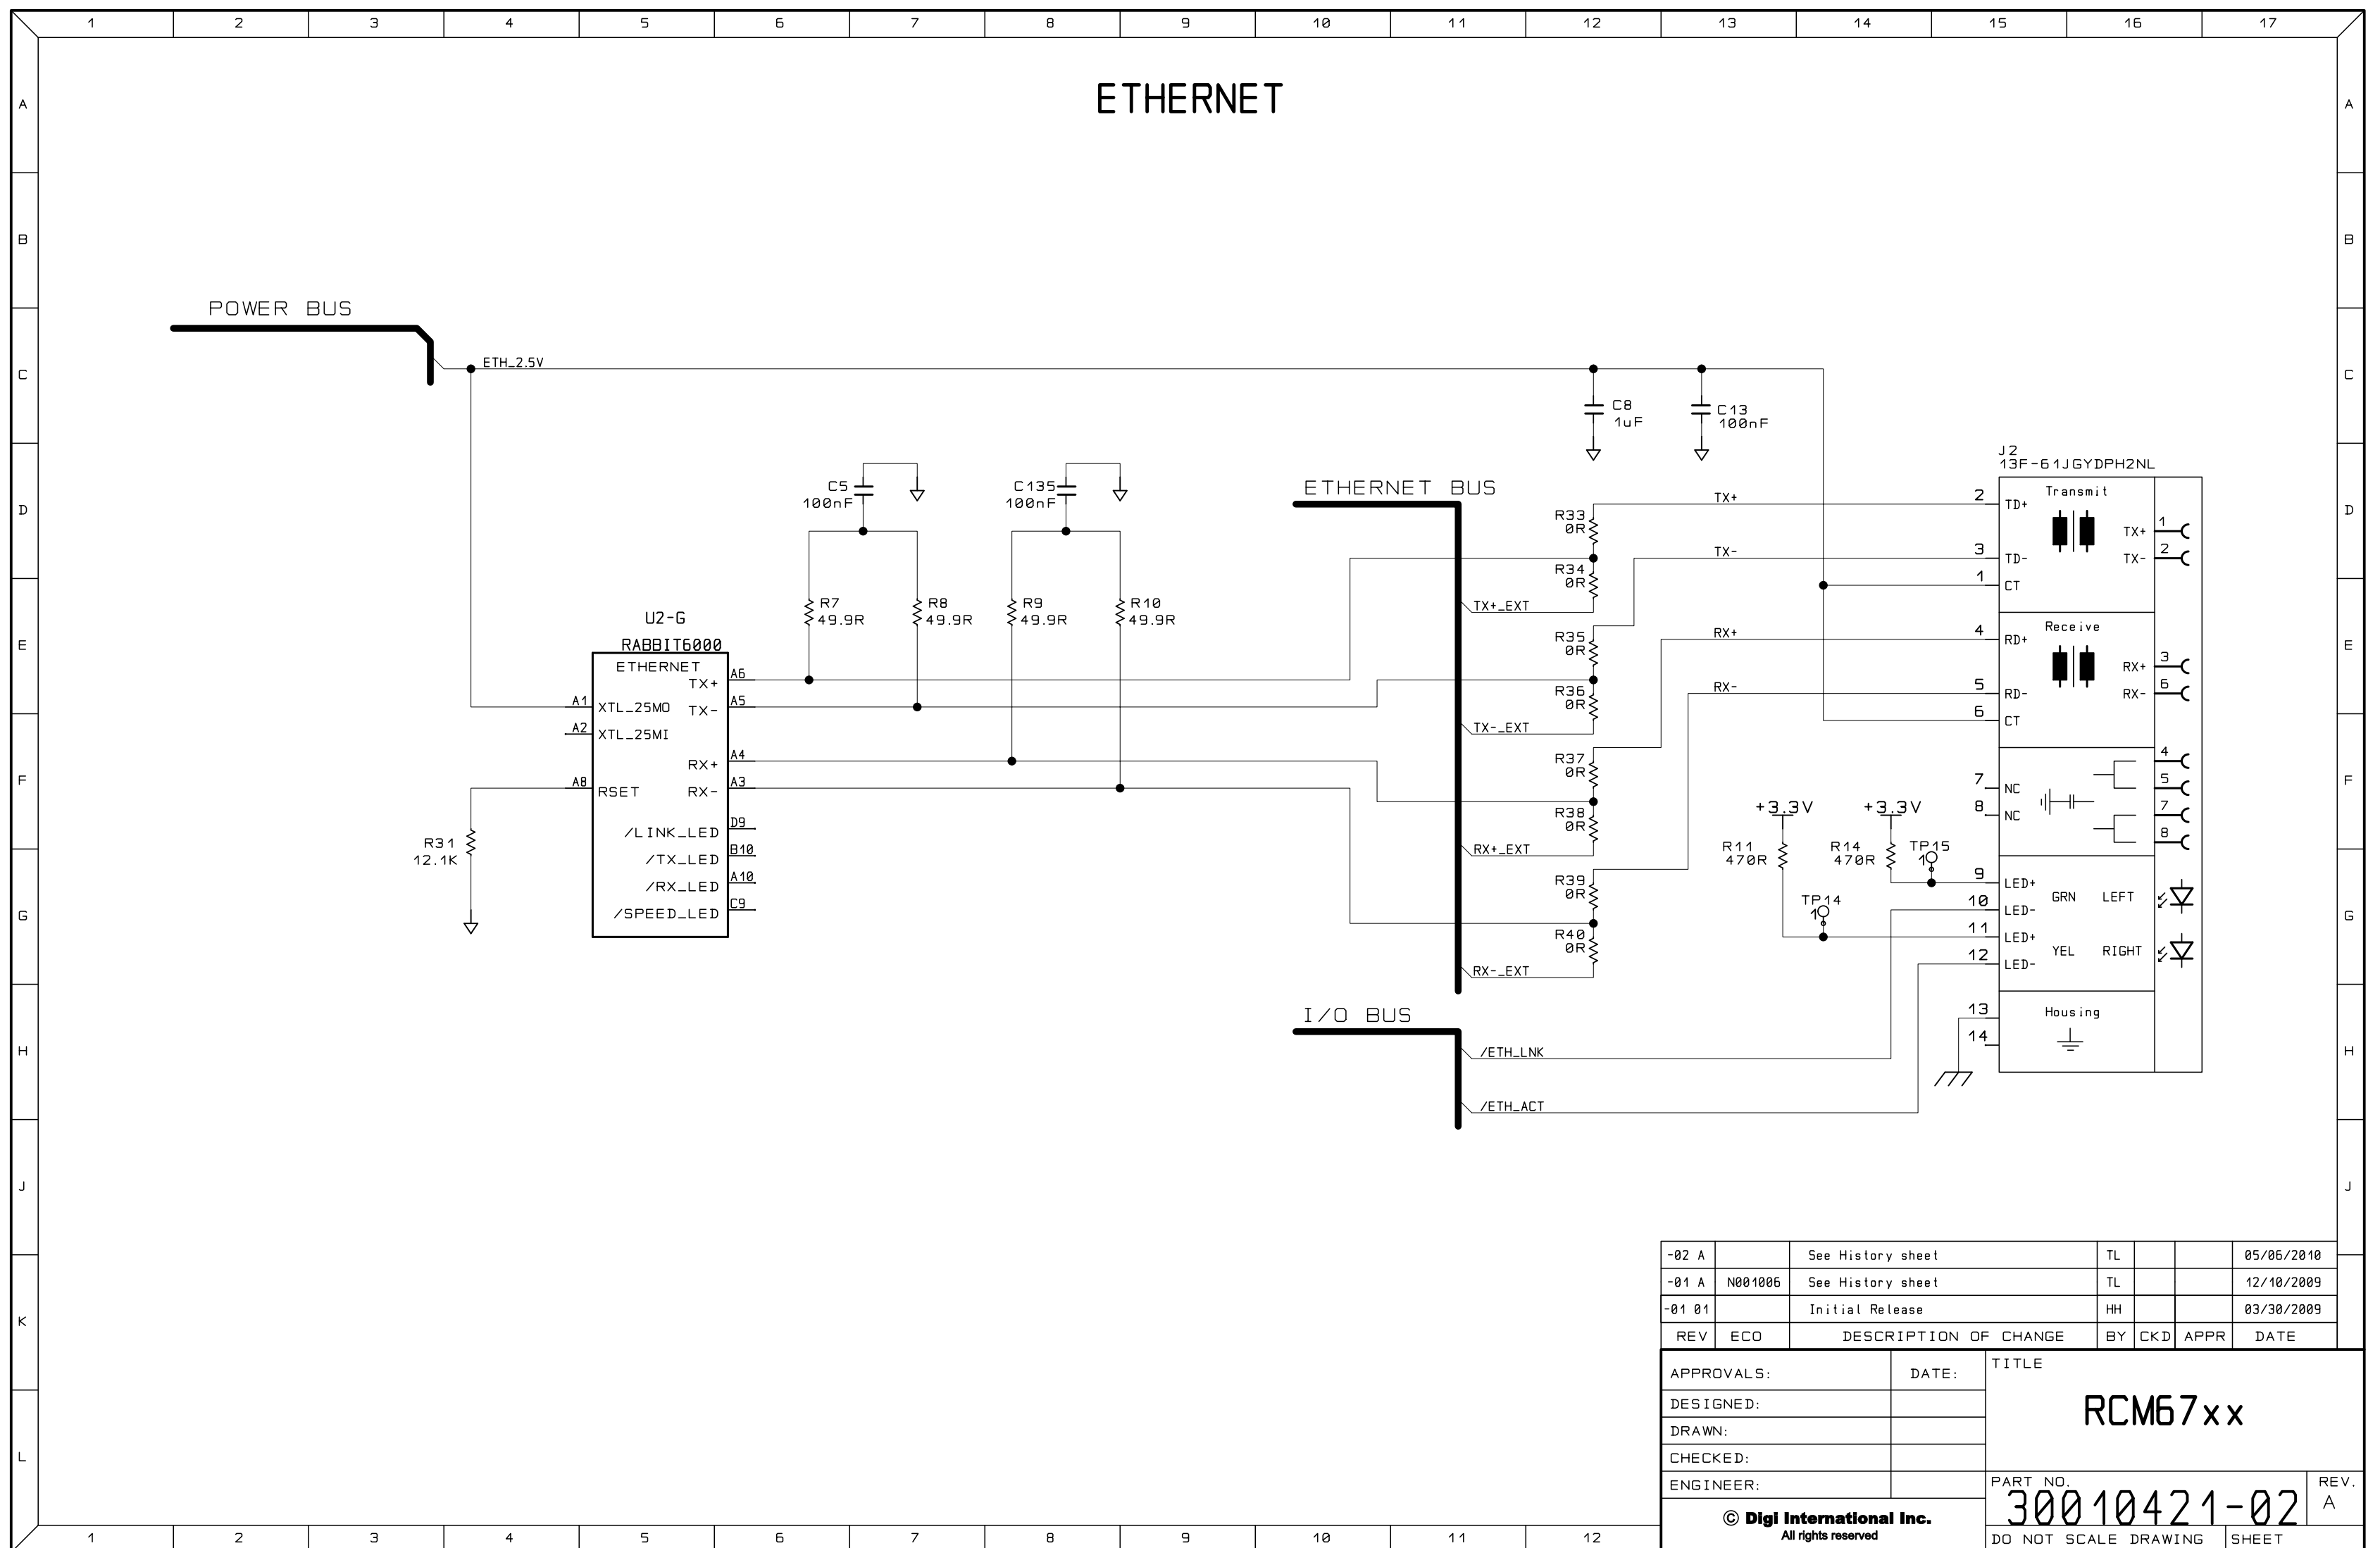

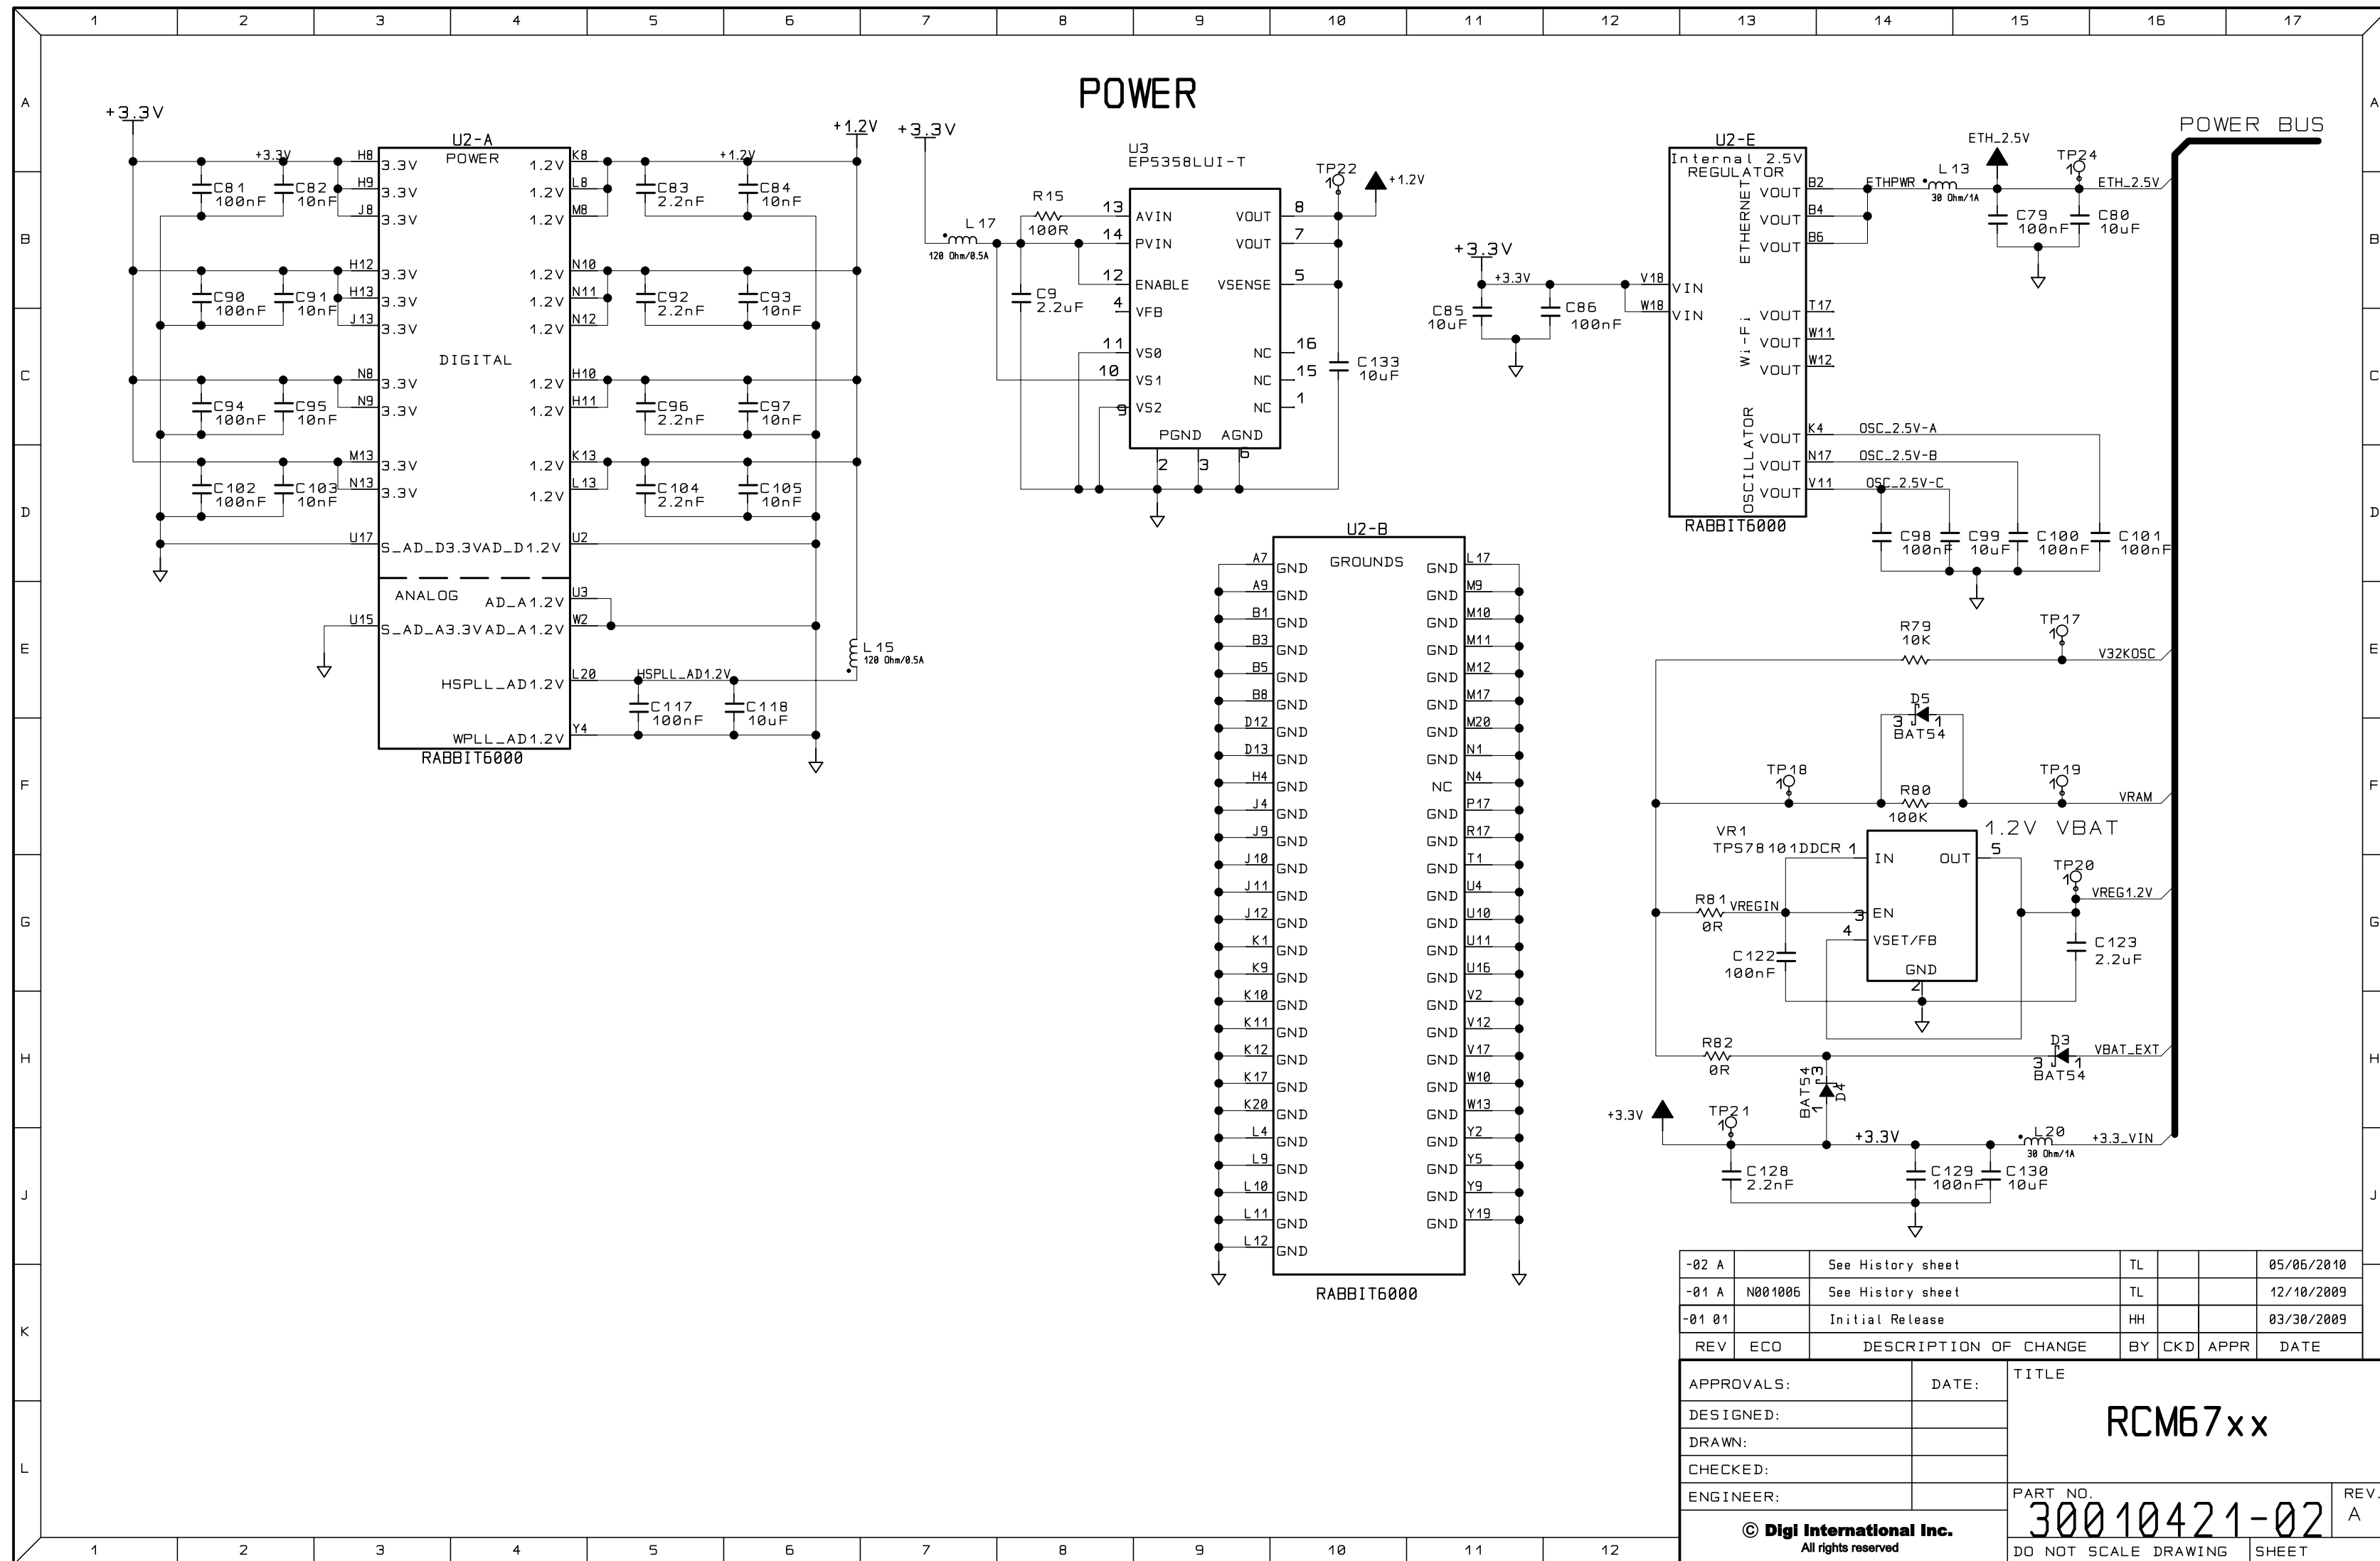

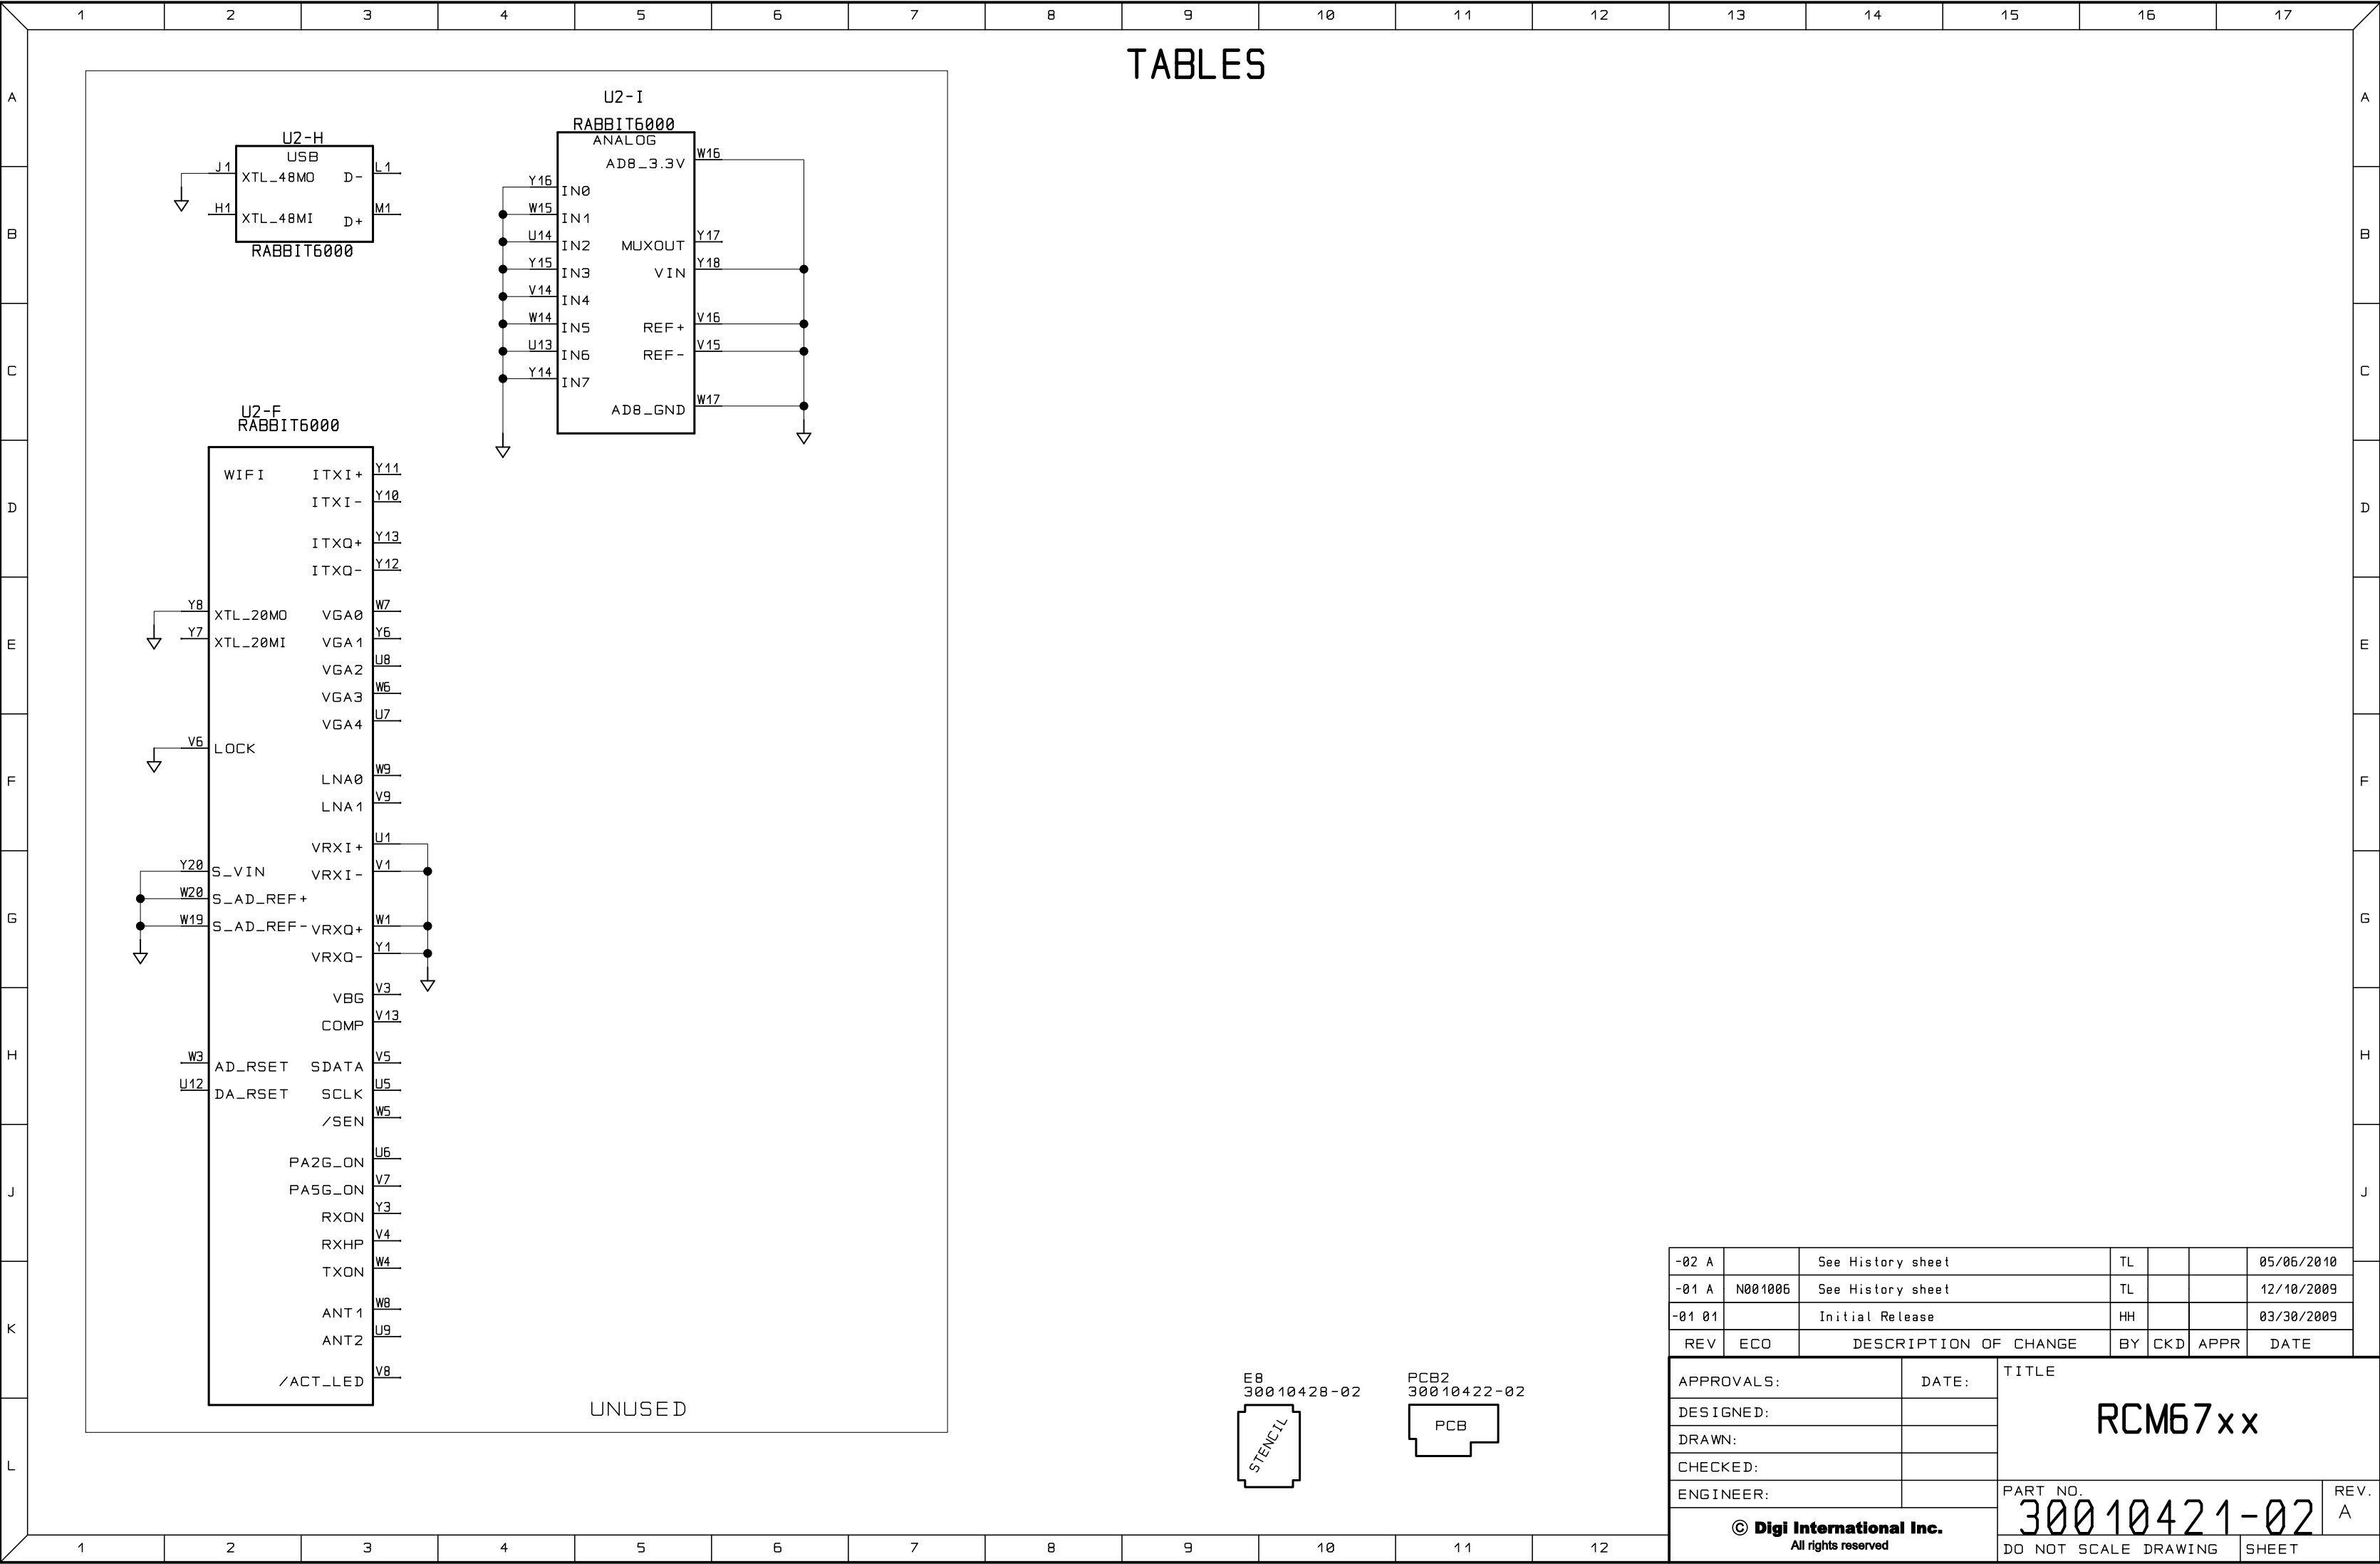

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	
A	Rev_01 to Rev_A Change List																	A
B	1. The internal Ethernet PHY of the Rabbit 6000 requires to connect the 2.5V power output from the Rabbit 6000 to the center tap of the Ethernet connector. The 2.5V voltage has been routed to the Tx and Rx center taps of the on-board connector.																	B
C	2. The Ethernet Activity LED pin has been used to bring out the 2.5V center tap voltage on the MiniCore edge connector. That is, the RCM67xx will no longer bring out a dedicated Ethernet Activity LED signal, but will instead bring out the 2.5V center tap voltage at that location.																	C
D	3. The Ethernet Link LED pin has been replaced with a GPIO driven combined Link & Activity signal on the MiniCore edge connector. That is, the RCM67xx will no longer bring out a dedicated Ethernet Link LED signal, but will instead bring out a software controlled combined Link & Activity signal at that location. PG0 GPIO pin has been connected to the edge connector as the combined Link & Activity signal.																	D
E	4. The Ethernet Link LED and Activity LED pins have been replaced with GPIOs on the on-board RJ45 connector. That is, the RCM67xx will software emulate the LED signals of the RJ45 connector. PG1 and PG2 GPIO pins have been dedicated to LINK and ACTIVITY LED signals, respectively.																	E
F	5. Connect both /CS1 and /CS2 to the /CE pin of the SRAM via zero ohm jumpers. Battery backed SRAM goes on /CS1 while fast SRAM goes on /CS2. Only battery-backed SRAM needs the 100k pull-up.																	F
G	6. Add 25-series serial flash as a population option.																	G
H	-01 Rev_A to -02 Rev_A Change List																	H
J	1. Layout change only: the RJ45 Ethernet connector has been centered /displaced by 19 mil/ from the original off-center position.																	J
K																		
L																		
	1	2	3	4	5	6	7	8	9	10	11	12						

-02 A		See History sheet	TL			05/06/2010
-01 A	N001006	See History sheet	TL			12/10/2009
-01 01		Initial Release	HH			03/30/2009
REV	ECO	DESCRIPTION OF CHANGE	BY	CKD	APPR	DATE

APPROVALS:	DATE:	TITLE RCM67xx				
DESIGNED:						
DRAWN:						
CHECKED:						
ENGINEER:		PART NO.				REV.
© Digi International Inc. All rights reserved		30010421-02				A
		DO NOT SCALE DRAWING				SHEET