

OP7200 eDisplay Series

Ethernet-Intelligent Operator Interface

The compact eDisplay is an intelligent operator interface ideal for data acquisition and stand-alone systems such as factory floor controls.




Overview

The OP7200 series of intelligent operator interfaces offers rugged I/O and Ethernet connectivity, along with optional A/D and touchscreen capabilities. The 10-Base-T Ethernet facilitates remote diagnostics, control and communication, including sending and receiving emails and alerts. Both models come equipped with a ¼ VGA display with a 9-key keypad and programmable on/off white LED backlight. The OP7200 series also provides easy-to-use menu building software and offer a programmable audible alarm for prompt notification and keypad/display feedback.

Functionality of the OP7200 series can be expanded using the optional RabbitNet™ expansion cards. RabbitNet expansion cards can be tailored to a large variety of demanding applications.

Application Highlight

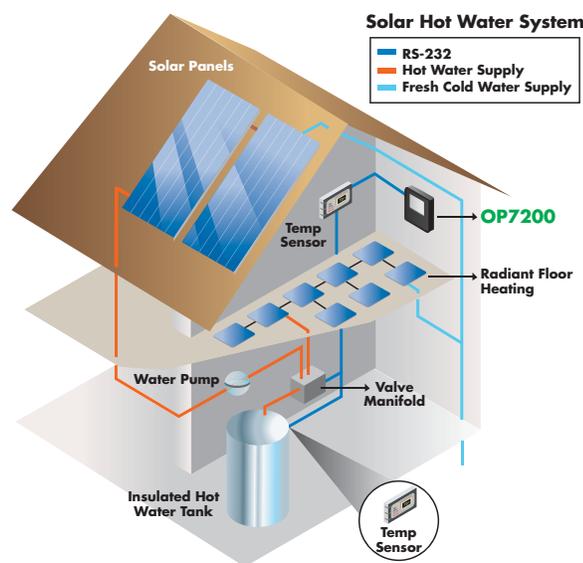

Potential Applications: Industrial real-time control and automation, remote machine control, data acquisition, display dependent applications

Features/Benefits

- Rabbit® 2000 microprocessor at 22 MHz
- ¼ VGA display (320 x 240 pixels)
- 10Base-T Ethernet, RJ-45
- 256K Flash/128K SRAM
- 24-27 industrialized I/O and 4 CMOS-compatible serial ports
- English and foreign language fonts
- Graphic and bitmap images
- Open source GUI libraries



Specifications

OP7200

OP7210

Feature		
Microprocessor	Rabbit® 2000 at 22 MHz	
Ethernet Port	10/100-compatible with 10Base-T interface, RJ-45	
Flash Memory	256K	
SRAM	128K	
Backup Battery	Socketed 3V lithium coin type, 265 mA·h	
Keypad/Display	¼ VGA (320 × 240 pixels) with programmable white LED backlight, black on white display, transreflective FSTN LCD, 6 o'clock viewing angle; 9-key keypad	
Touchscreen	4096 × 4096 resistive touchscreen	None
LEDs	4: Power On, Microprocessor Error, Ethernet Link, Ethernet Activity	
Digital Inputs	19: Protected to ±36VDC	16: Protected to ±36VDC
Digital Outputs	8: Individually configurable in software to sink up to 350 mA each, 36VDC max., or source up to 250 mA each, 40VDC max	
Analog Inputs	8 single-ended or 4 differential, 200 kΩ input impedance, 1.5 ksamples/s sampling rate Software-controlled ranges: 0-1V, 2V, 5V 10V, 20VDC (11-bit single-ended, 12-bit differential)	None
Connectors	Four 12-position screw-terminal headers, 0.1" pitch	Three 12-position screw-terminal headers, 0.1" pitch
Serial Ports	4 serial ports: <ul style="list-style-type: none"> • 2 RS-232 or 1 RS-232 (with CTS/RTS) • 1 RS-485 with onboard network termination and bias resistors or 1 RS-422 SPI master port • One 5V CMOS-compatible programming port 	
Serial Rate	Max. burst rate = CLK/32, Max. sustained rate = CLK/64	
Real-Time Clock	Yes	
Timers	Five 8-bit timers (4 cascadable from the first), one 10-bit timer with 2 match registers	
Watchdog/Supervisor	Yes	
Power	9-40V DC or 22-26V AC, 4W max.	
Temperature	Operating Range: -10° C to +65° C Storage Range: -30° C to +80° C	
Humidity	20% to 70%, non-condensing	
Unit Size	4.41" × 5.67" × 1.70" (112 mm × 144 mm × 43 mm)	
Pricing		
Price (qty. 1)	\$449	\$399
Part Number	20-101-0535	20-101-0536
Starter Package	\$649	\$599
Part Number	20-101-0535, 101-0543	20-101-0536, 101-0543

Visit www.digiembedded.com for part numbers.

DIGI SERVICE AND SUPPORT - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong one-year warranty. www.digi.com/support

Digi International
877-912-3444
952-912-3444
info@digi.com

**Digi International
France**
+33-1-55-61-98-98
www.digi.fr

**Digi International
KK**
+81-3-5428-0261
www.digi-intl.co.jp

**Digi International
(HK) Limited**
+852-2833-1008
www.digi.cn

BUY ONLINE • www.digiembedded.com



91001597
82/411

© 2005-2011 Digi International Inc.
All rights reserved. Digi, Digi International, the Digi logo, the Making Wireless M2M Easy logo, Rabbit and RabbitNet are trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective owners. All information provided is subject to change without notice.

